

UniFi UISP Branding

Q UTP-G3-Touch-Pro


Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech Inte

Managed VoIP > G3 Touch Pro

Datasheet

Marketing Images

Installation Guide

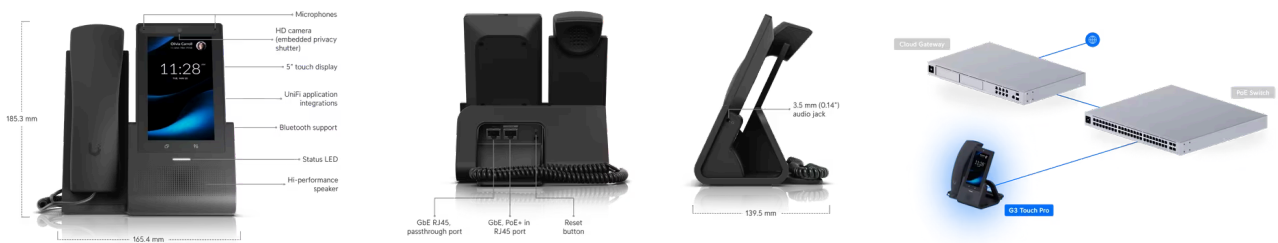

Mechanical

Dimensions	165.4 x 139.5 x 185.3 mm (6.5 x 5.5 x 7.3")
Weight	1 kg (2.2 lb)
Enclosure material	Polycarbonate, aluminum alloy (base)
Mounting	Desktop
Colour	Black

Display

Display size	127 mm (5") diagonal
Resolution	720 x 1280 HD
Screen technology	Multi-touch
Screen surface treatments	Anti-glare coating

Audio

Handset dynamic receiver	32 ohm Sensitivity: 121 dB/10mW at BK4195
Handset microphone	Omnidirectional electret microphone SNR 70 dB Sensitivity -38 ±3 dB
Hands-free speaker	Mono, 4 ohm Nominal power: 2W Max. power: 3W
Hands-free microphone	Dual omnidirectional MEMS microphones

Hardware

Processor	Octa-Core ARM® Cortex® A53
Memory	Storage: 32 GB RAM: 2 GB
Power method	PoE 44—57V DC, 15.4W
Connectivity	(2) GbE RJ45 ports 802.11 a/b/g/n/ac WiFi Bluetooth® 4.2 (General use) Bluetooth® 5.2 (Ubiquiti G3 Wireless Handset only)
Headset support	3.5 mm (0.14") audio jack
Camera	2592 x 1944, 5MP (Embedded privacy shutter)
LED	R/G/B/W
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

Software

UniFi OS application	UniFi Talk Talk Relay
-----------------------------	--------------------------

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.