


# MAXHUB UC S15

Ultra-Wide Angle, All-in-One Collaboration Videobar for Huddle & Small Rooms

The MAXHUB UC S15 provides not only a 4K wide-angle BYOD Videobar with excellent audio solution, but also a collaboration platform for Huddle & Small rooms meeting. Featuring easy setup process, one-click launcher and multiple collaboration applications.

Moreover, cooperate with WT13M, UC S15 embed BYOM, can share content as well as camera, microphone and speaker easily.

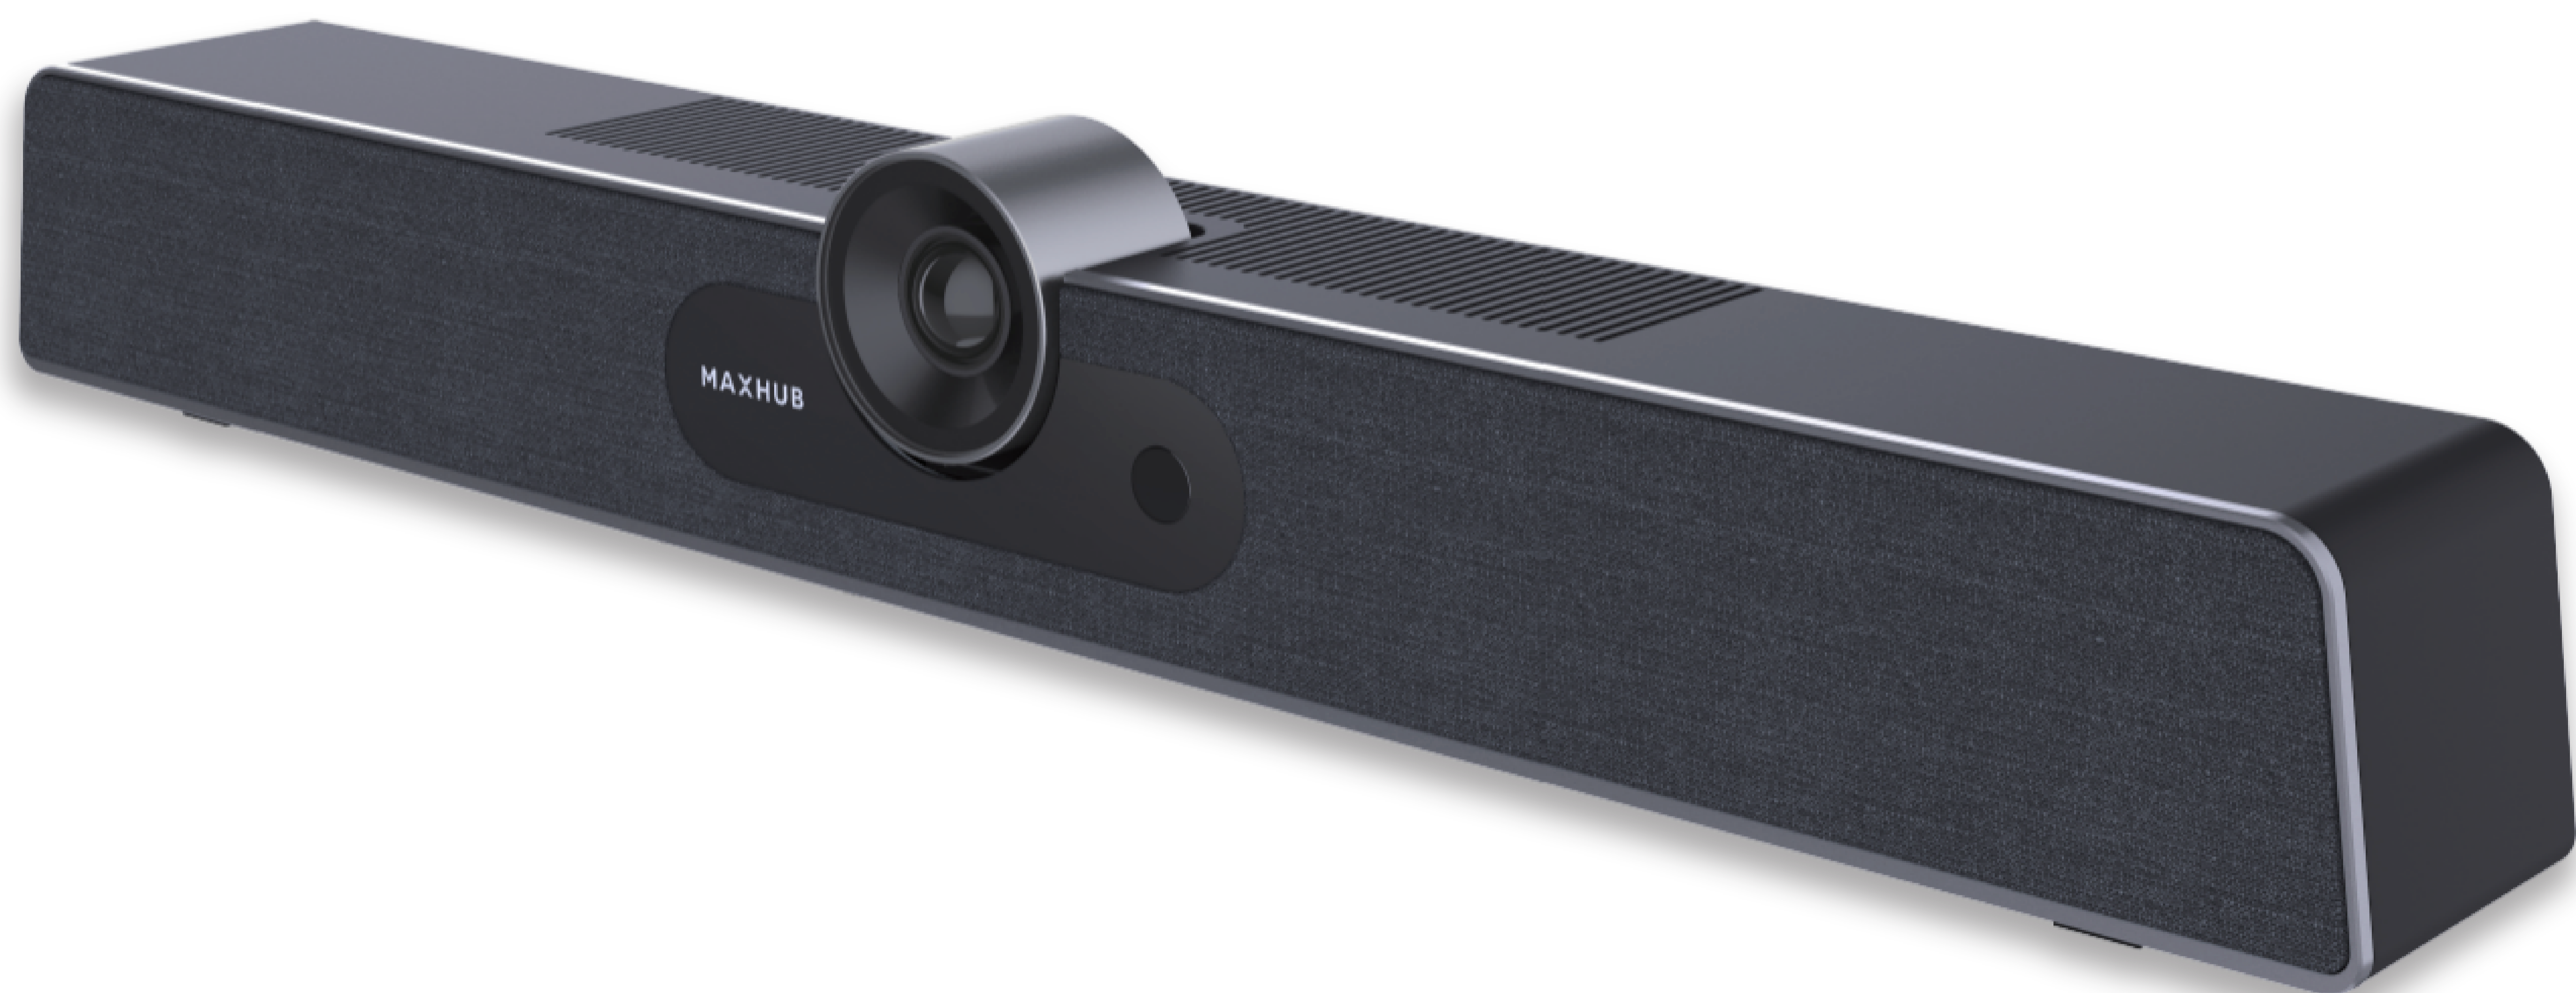


## Ultra HD 4K

Exceptional UHD video quality



## 120° FOV

Provides full-room coverage



## Auto Framing

AI Vision  
Intelligent face detection




## BYOM

Wireless sharing content as well as camera, microphone and speaker



## Voice Localization

Speaker Tracking  
Voice tracking



## PoE

PoE support to simplify installation and minimize cost



## Built-in System

Agnostic meeting platform



## PIR Sensor

Auto on/off  
Completely hands-free and energy saving

## Camera

Pixel	12M		
Sensor	1/2.3-inch 12MP Sony sensor		
ZOOM	5x Digital Zoom		
Resolution and Frame Rate:			
MJPEG/H264:	(1) 3840 x 2160	(2) 2560 x 1440	(3) 1920 x 1080
	(4) 1280 x 720	(5) 1024 x 576	(6) 960 x 540
	(7) 800 x 600	(8) 640 x 480	(9) 640 x 360
	(10) 480 x 270	(11) 352 x 288	(12) 320 x 240
	(13) 320 x 180		
NV12/YUY2	(1) 1920 x 1080	(2) 1280 x 720	(3) 640 x 360
Output Format	H.264; YUY2; MJPG		
Field Of View	FOV 120° (D)		
Adjustable Angle	±15° (V)		
Focus Mode	Fixed-Focus		
Focus Distance	1m		
Special Features	Auto Framing: automatic adjustment FOV to fit in all participants Speaker Tracking: voice triggered people tracking 3 Zooming Presets that instantly sets up for conference		

## Audio

### Speaker

Sound Channel	1.1
Output Power	8W + 3W
Maximum Sound Pressure	83dBSPL@1m
Signal to Noise Ratio	>75dB
Frequency Range	150Hz ~ 18kHz

### Microphone

Quantity	6
Voice Pickup Range	100Hz~7.5kHz
Microphone Frequency Range	100Hz ~ 7.5kHz
Special Features	Noise Reduction, Echo Cancellation, Anti-Reverberation, Built-in AGC Algorithm

## PIR Sensor

In power-on mode, it will automatically enter standby state If no moving object is detected within 3 meters within 30 minutes, minimizing energy consumption;  
In standby mode, it automatically starts up when detecting moving objects within 3 meters, simplifying the setup process.

## Input/Output Port

USB 3.0 Type-C	Connect USB host, upgrade system, etc.
USB USB 3.0 Type-A	Flash drive, Keyboard, Mouse,etc.
USB USB 2.0 Type-A	Flash drive, Keyboard, Mouse
AUDIO OUT	Used for external audio equipment
HDMI OUT	HDMI 2.0, support 280*720p, 1920*1080p, 3840*2160p, support CEC
DC 2.0	Used for 12V power input power supply
RJ45	IP Support, provides PoE power

## Power

Power Requirements	12V
Standby mode power consumption	≤0.5W
PoE Power	Yes (IEEE 802.3af or 802.3at)

## Operating System

System Version	Android 9.0
RAM	4G
ROM	16G
CPU	2×A72+4×A53

## Wi-Fi

Wi-Fi Protocol	802.11ac/n/g/b/a/ax
Working Band	2.4GHz;5GHz
Working Mode	AP+STA
Working Distance	0~10m

## Bluetooth

Version	5.0
Protocol	A2DP;HFP;HSP;AVRCP;BLE
WorkinDistance	0~10m

## Mount

- Wall-mounted
- TV mount kit (Optional)

## Physical Specifications

Dimension L×H×W	462×76×93 mm (18.2x3.0 x3.7 inch)
Dimension(package) L×W×H	1pcs: 538x160x169 mm (21.2x6.3x6.7 inch) 4pcs: 628x433x380 mm (24.7x17.0x15.0 inch)
Net Weight	1.20kg (2.65 lbs)
Gross Weight	1pcs: 2.74kg (6.04 lbs) 4pcs: 12.90kg (28.44 lbs)

## Environmental Conditions

Operation Temperature	0℃~40℃
Operation Humidity	10%~90%RH
Storage Temperature	-20℃~60℃
Storage Humidity	10%~90%RH
Below 5000 meters	

## Application Supported

- MAXHUB Meeting OS
- MAXHUB Share
- MAXHUB Pivot
- MAXHUB Share
- Whiteboard

## Compatibility

Support major VC software including ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.

## Warranty

- 3 Years hot swap
- Accessories one year

## Compatible BYOM Dongle

MAXHUB WT13M

## What's in the box

- HDMI Cable 1.5m (59.1 inch)
- USB 3.0 Cable 1.8m (70.87 inch)
- USB 2.0 Cable 3m (118.11 inch)
- Lens Cover
- Wall-mounted Components
- Power Adapter
- Remote Control
- User Manual



**MAXHUB**  
Beyond Collaboration