

[UniFi](#) [UISP](#) [Branding](#)

Q Search UniFi products

[Switching](#)

[WiFi](#)

[Camera Security](#)

[Door Access](#)

[CloudKeys & Gateways](#)

[Power Tech](#)

[Inte](#)


Device Bridge > [Device Bridge](#)

[Datasheet](#)

[In The Box](#)

[Marketing Images](#)

[Installation Guide](#)

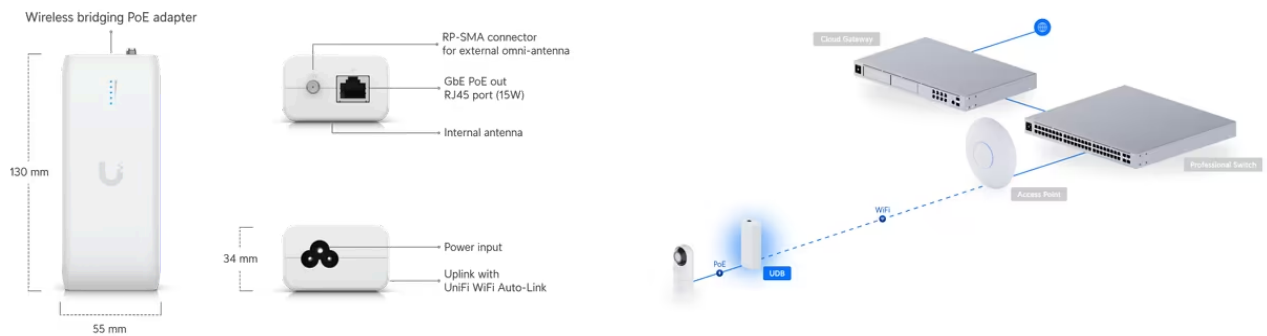

Mechanical

Dimensions 130 x 55 x 34 mm (5.1 x 2.2 x 1.3")

Weight 200 g (7.1 oz)

Enclosure material Polycarbonate

Mount material Polycarbonate

Hardware

Management interface WiFi

Networking interface (1) GbE RJ45 port

PoE interface (1) Passive PoE output

Button (1) Factory-reset

LED (4) Blue: signal
(1) White/blue: indicator

Power method	100—240V AC, 0.45A Max., 50/60 Hz
Max. power consumption	AC input: 25W Excluding PoE output: 10W
Max. PoE wattage per port	15W
Supported voltage range	100—240V AC
WiFi standards	802.11a/n/ac
Max. TX power	
2.4 GHz	-
5 GHz	21 dBm
6 GHz	-
MIMO	
2.4 GHz	-
5 GHz	2 x 2
6 GHz	-
Max. data rate	
2.4 GHz	-
5 GHz	866.7 Mbps (BW80)
6 GHz	-
Antenna gain	
2.4 GHz	-
5 GHz	Internal antenna : 5 dBi / External omni antenna : 4 dBi
6 GHz	-
Antenna	(1) Internal antenna (1) RP-SMA connector for external omni-antenna
Mounting	Wall (Included)
Ambient operating temperature	-10 to 40° C (14 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

Supported Data Rates

802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
802.11ac	6.5 Mbps to 866.7 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80)

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.