

Tech Specs

UniFi UISP Branding

Switching WiFi Camera Security Door Access Cloud Keys & Gateways Power Tech New I


Camera Security > [G5 Flex](#)

Datasheet


In The Box

Marketing Images

Installation Guide

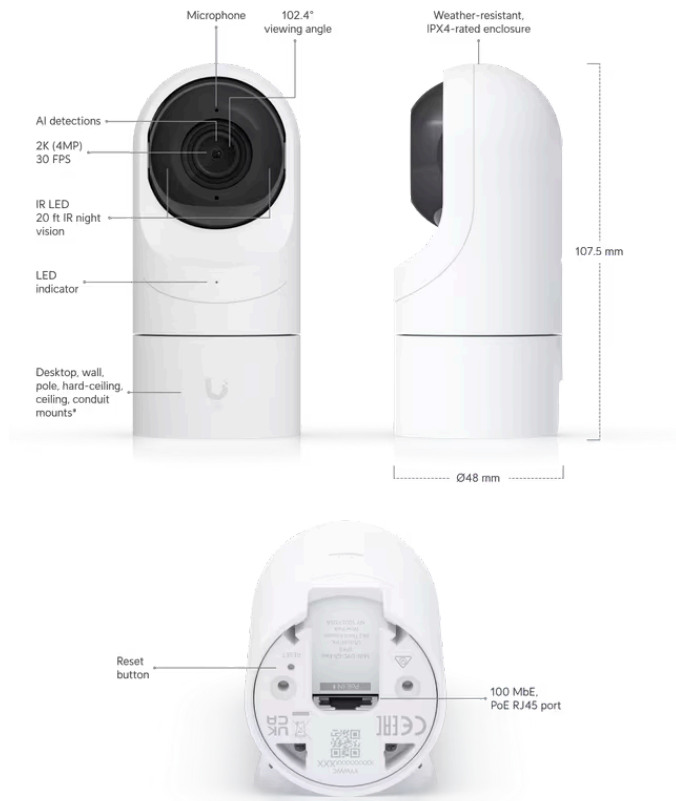

* Ceiling and conduit mounts sold separately.

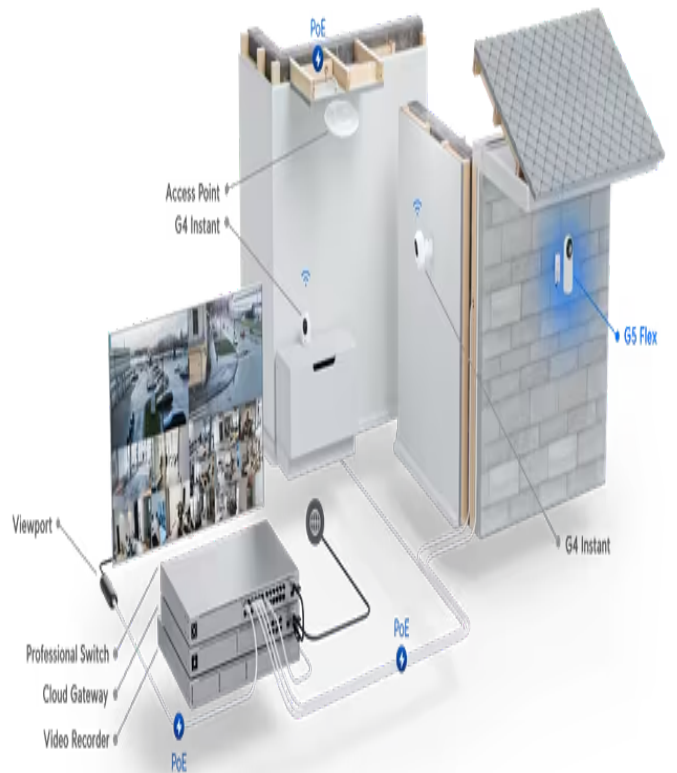

Mechanical

Dimensions Ø48 x 107.5 mm (Ø1.9 x 4.2")

Weight 170 g (6 oz)

Enclosure material Polycarbonate

Mount material Polycarbonate

Weatherproofing IPX4

Resistance IK04

Optics

Sensor 5MP CMOS

Lens Fixed focal length

View angle H: 102.4°, V: 54.9°, D: 120.6°

Night mode Built-in IR LED illumination and IR cut filter

Video

Resolution 4MP 2688 x 1512 (16:9)

Max. frame rate 30 FPS

Image settings Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

System

Processor Dual-core Arm® Cortex®-A7 based chip

Networking interface 10/100 MbE RJ45 port

Max. power consumption 4W

Power method PoE

Supported voltage range 37—57V DC

LED R/G/B/W

Button Factory reset

Mounting Desktop, wall, pole, hard-ceiling (Included)
Ceiling, conduit (Sold separately)

Ambient operating temperature -20 to 40° C (-4 to 104° F)

Ambient operating humidity 0 to 90% noncondensing

Certifications FCC, IC, CE

Audio

Microphone Yes (Can be disabled)

Software

Web application UniFi Protect: Version 2.2.7 or 2.7.28 and later

Mobile app UniFi Protect iOS™ and Android™: Version 1.10.0 and later

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.