

[UniFi](#) [UISP](#) [Branding](#)

[Switching](#) [WiFi](#) [Camera Security](#) [Door Access](#) [CloudKeys & Gateways](#) [Power Tech](#) [Inte](#)


Digital Signage > [Connect Display](#)

Datasheet

- [In The Box](#)
- [Marketing Images](#)
- [Installation Guide](#)



*VESA mount included. Table stand, surface mount, arm mount and flush mount optional.

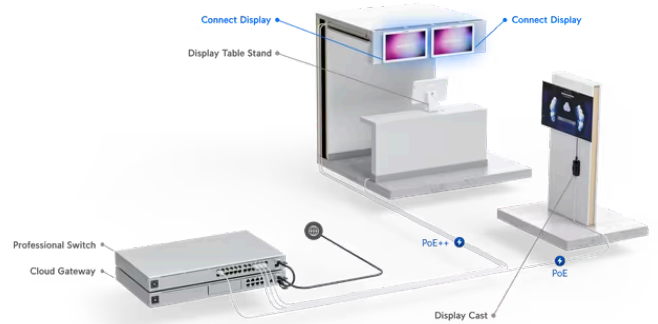

Mechanical

Dimensions	538.3 x 330 x 37 mm (21.2 x 13 x 1.5")
Weight	4.9 kg (10.8 lb)
Enclosure material	Plastic, aluminum
Mounting	<ul style="list-style-type: none"> VESA mount adapter (included) Table stand (optional) Surface mount (optional) Arm mount (optional) Flush mount (optional)

Hardware

Display size	546 mm (21.5") diagonal
Resolution	1920 x 1080 FHD (16:9)
Display luminance	250 nits (typical)
Touch screen technology	Capacitive multi-touch
Screen orientation	Portrait/landscape
Processor	Octa-core ARM® Cortex®-A53 at 2.2 GHz
Memory	Storage: 32 GB RAM: 3 GB
Power method	PoE++
Power supply	UniFi PoE++ switch
Max. power consumption	27W
Connectivity	(1) GbE RJ45 port (1) USB-C port (Reserved feature for future function update) Bluetooth® 4.2
Button	Factory reset
Microphone	Yes
Speaker	Yes
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	20 to 90% noncondensing
Certifications	CE, FCC, IC

Software

Management application	UniFi Connect web: Version 2.1.14 and later UniFi Connect iOS™ and Android™: Version 1.0.0 and later
-------------------------------	---

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.