


[UniFi](#) [UISP](#) [Branding](#)

[Switching](#) [WiFi](#) [Camera Security](#) [Door Access](#) [CloudKeys & Gateways](#) [Power Tech](#) [Inte](#)

Network Storage > [UNAS Pro](#)

Datasheet

- [In The Box](#)
- [Marketing Images](#)
- [Installation Guide](#)

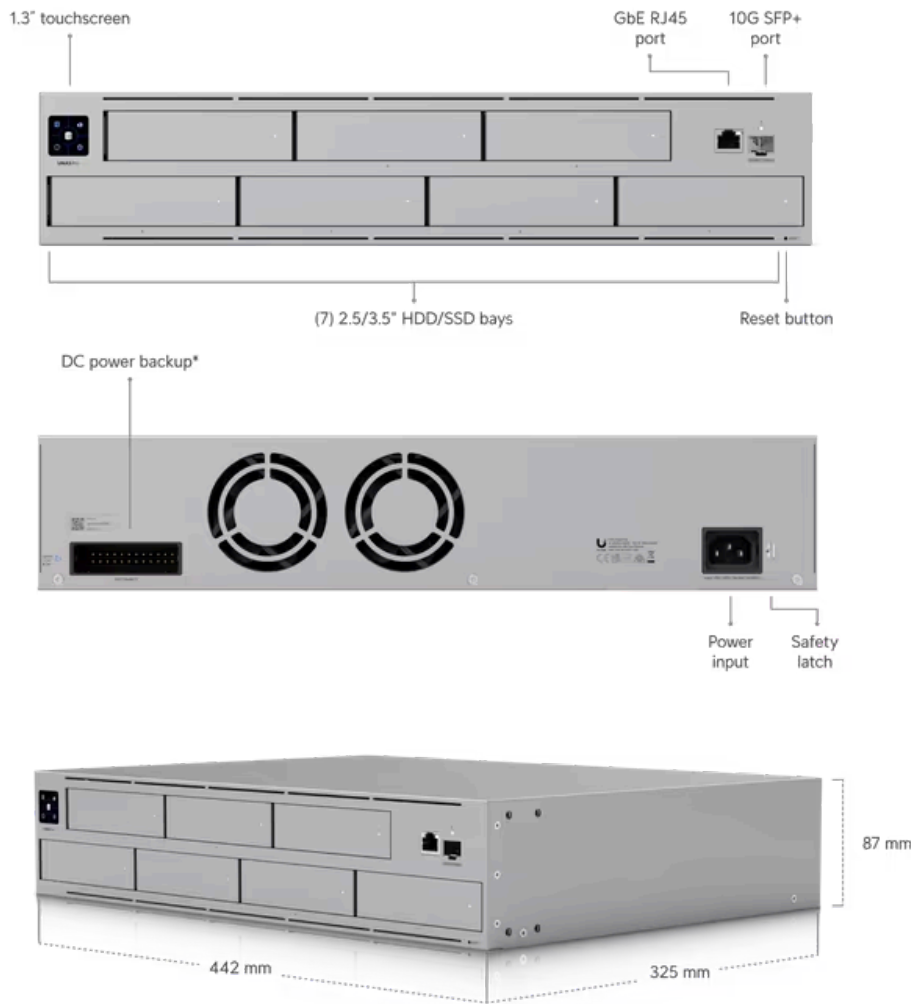

*Requires UniFi Power Backup.

Mechanical

Dimensions

442 x 325 x 87 mm (17.4 x 12.8 x 3.4")

Weight Without mounting brackets: 9.2 kg (20.3 lb)
With mounting brackets: 9.5 kg (20.8 lb)

Enclosure material SGCC steel

Mount material SGCC steel

Hardware

Processor Quad-Core ARM® Cortex®-A57 at 1.7 GHz

System memory 8 GB

Management interface Ethernet In-Band

Networking interface (1) GbE RJ45 port
(1) 1/10 GbE SFP+ port

RF interface Bluetooth 4.1

Power method (1) Universal AC input, 100—240V AC, 3A Max., 50/60 Hz
(1) USP-RPS DC input, 11.5V DC, 13.91A

Power supply AC/DC, internal, 200W

Supported voltage range 100—240V AC

Max. power consumption 160W

Max. power budget for Drives 135W

ESD/EMP protection Air: ± 12kV, contact: ± 8kV

LCM Display (1) 1.3" touchscreen

Ambient operating temperature -5 to 40° C (23 to 104° F)

Ambient operating humidity 5 to 95% noncondensing

Certifications FCC, CE, IC

LEDs

Ethernet Green: 1 Gbps
Amber: 10/100 Mbps

SFP+ White: 10 Gbps
Green: 1 Gbps

HDD White: disk detected
Amber: disk error

RPS

Blue: ready

Application Requirements

UniFi Drive

Version 1.16.0 and later

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.