

Switching    WiFi    Camera Security    Door Access    Cloud Keys & Gateways    Power Tech    New I


Camera Security > [AI Theta Hub](#)

Datasheet

In The Box

Marketing Images

Installation Guide

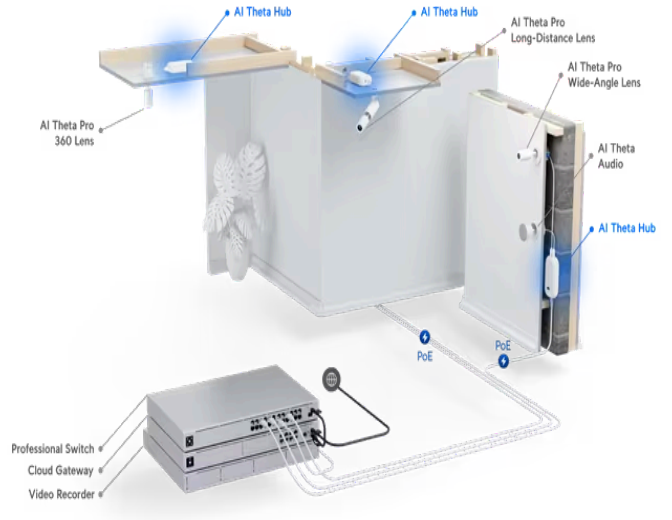

## Mechanical

### Dimensions

140 x 70 x 38 mm (5.5 x 2.8 x 1.5")

### Weight

UVC-AI-Theta-Hub: 330 g (11.6 oz)  
UVC-AI-Theta-Hub Mount: 35 g (1.2 oz)

### Enclosure material

Aluminum alloy

### Mount material

Aluminum alloy

## Video

### Video compression

H.264

**Image settings**

Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

---

**System**

<b>Processor</b>	Quad-core Arm® Cortex®-A53 based chip
<b>Networking interface</b>	GbE RJ45 port
<b>Max. power consumption</b>	12.5W
<b>Power method</b>	PoE
<b>Supported voltage range</b>	37—57V DC
<b>Output power</b>	5V DC, 1A per port
<b>Display</b>	0.96" color display
<b>Button</b>	Factory reset
<b>Mounting</b>	Wall, ceiling mount
<b>Ambient operating temperature</b>	-20 to 40° C (-4 to 104° F)
<b>Ambient operating humidity</b>	10 to 90% noncondensing
<b>Certifications</b>	FCC, IC, CE

---

**Software**

<b>UniFi OS application</b>	UniFi Protect
<b>Mobile app</b>	UniFi Protect iOS™ and Android™

**Stay in Touch**

© 2024 Ubiquiti, Inc. All rights reserved.