


WiFi Switching Cloud Keys & Gateways Camera Security Door Access Power Tech New I


Switching > Flex

Datasheet

- In The Box
- Marketing Images
- Installation Guide

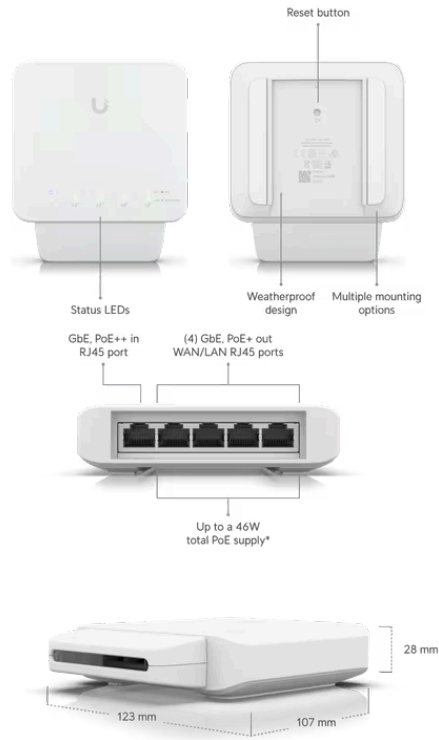

*When powered with a PoE++ switch or a 60W PoE adapter (sold separately).

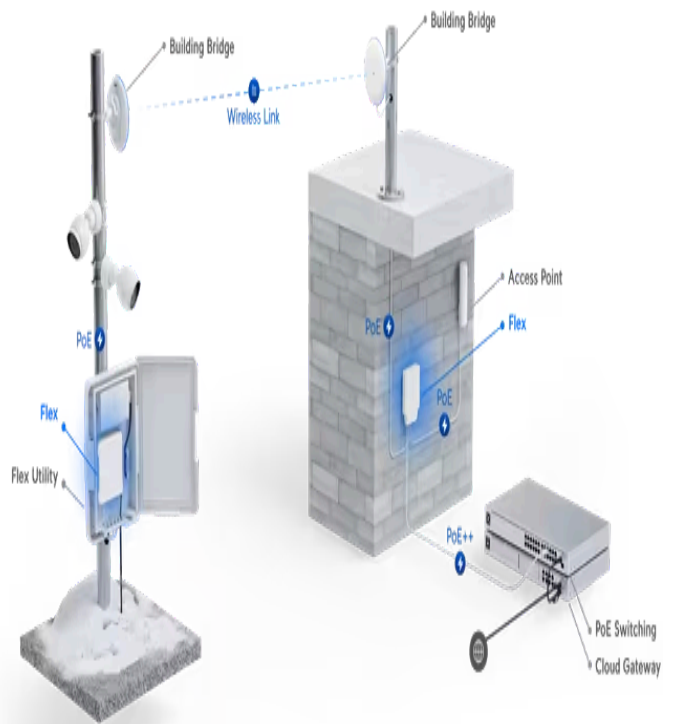

Mechanical

Dimensions 122.5 x 107.1 x 28 mm (4.8 x 4.2 x 1.1")

Weight 230 g (8.1 oz)

Hardware

Management interface	Ethernet In-Band
Networking interface	(5) GbE RJ45 ports
PoE interface	(4) PoE+ (Pins 1, 2+; 3, 6-)
Total non-blocking throughput	5 Gbps
Switching capacity	10 Gbps
Power method	PoE++
Power supply	PoE/PoE+ (Pins 1, 2+; 3, 6-) PoE++ (Pins 1, 2+; 3, 6- and 4, 5+; 7, 8-) 50V/60W PoE adapter (Not included)
Supported voltage range	PoE: 44—57V DC PoE+/PoE++: 50—57V DC
Max. power consumption	5W (Excluding PoE output)
Total available PoE	46W* *When powered with a PoE++ switch or a 60W PoE adapter (Sold separately).
Max. PoE wattage per port by PSE	25W
ESD/EMP protection	Air/contact: ± 16kV
Button	Factory reset
Ambient operating temperature	46W PoE output: -40 to 55° C (-40 to 131° F) 25W PoE output: -40 to 65° C (-40 to 149° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

Switching Features

Layer 2 features	Port isolation Port mirroring Multicast / broadcast rate limiting Flow control Jumbo frames Egress rate limit
Layer 3 features	-

LEDs

System	Status
Ethernet	PoE Speed/link/activity
PoE	Link/activity

Application Requirements

UniFi Network Version 5.10.3 and later

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.