

UniFi UISP Branding

Search UniFi products

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech Inte


Special Devices > AI Port

Datasheet

In The Box

Marketing Images

Installation Guide

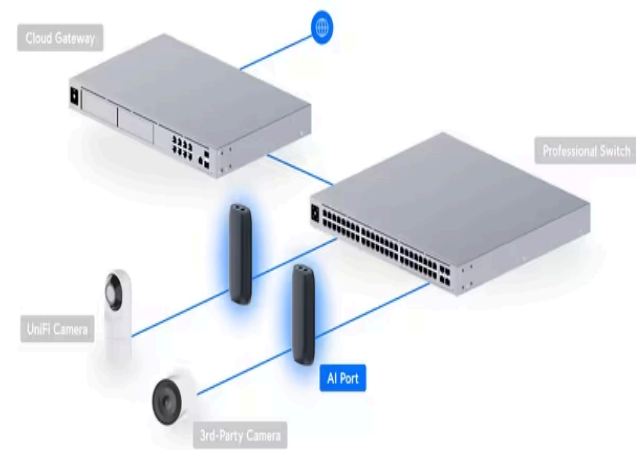

*PoE+ input required for PoE output (12.95W). PoE++ input required for PoE+ output (25.5W).
 **Rack mount sold separately.
 *** SD card support coming soon.

Mechanical

Dimensions

Without mount: 150 x 64 x 38.4 mm (5.9 x 2.5 x 1.5")
 With mount: 152.7 x 69 x 47.8 mm (6 x 2.7 x 1.9")

Weight

Without mount: 258.3 g (9.1 oz)
 With mount: 294 g (10.4 oz)

Enclosure material

Polycarbonate

Mount material

Polycarbonate

Pole mount diameter

>45 mm (1.8") on pipe outer diameter

Hardware

Networking interface	(1) GbE RJ45 port
Max. camera resolution	Width: 3840 pixels Height: 2160 pixels
Power method	PoE PoE+ input required for PoE output (12.95W) PoE++ input required for PoE+ output (25.5W)
LEDs	Blue/white
Button	Factory-reset
Ambient operating temperature	-20 to 40° C (-4 to 104° F)
Ambient operating humidity	20 to 90% noncondensing
Certifications	FCC, IC, CE

Software

Web application	UniFi Protect: Version 5.1 and later
Mobile app	UniFi Protect iOS™ and Android™

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.