

UniFi UISP Branding

Q UA-G3-Pro-W

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech Inte



Readers > [G3 Reader Pro](#)

Datasheet

In The Box

Marketing Images

Installation Guide

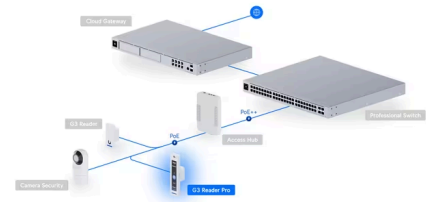

Mechanical

Dimensions 160 x 40.4 x 40.55 mm (6.3 x 1.59 x 1.6")

Weight 136 g (4.8 oz)

Enclosure material Polycarbonate, glass

Mount material Aluminum alloy

Mounting Wall mount (Included)
Gangbox mount (Included)
Angle mount (Optional)
Junction box (Optional)

Weatherproofing IP55

Hardware

Networking interface (1) GbE RJ45 port

Connectivity BLE 4.2
NFC

Power method	PoE
Supported voltage range	48V DC
Max. power consumption	6W
ESD/EMP protection	Air: $\pm 15\text{kV}$, contact: $\pm 8\text{kV}$
Sensor	Proximity sensor
Camera view angle	H: 96.67° , V: 123.15° , D: 153.11°
Microphone	Yes
Speaker	(1) 4 ohm, 1.5W
LEDs	R/G/B/W/Amber (Learn more)
Button	(1) Factory-reset
NFC frequency	13.56 MHz
NFC read range	< 30 mm
NFC technology	ISO/IEC 14443A / 14443B / 15693 / 18092 (Ecma 340) MIFARE Classic / MIFARE DESFIRE Sony FeliCa™ (ID only) NFC Forum tags T1T, T2T, T3T, T4T and T5T ECP 2.0
Operating environment	Outdoor use
Ambient operating temperature	Device: -30 to 45°C (-22 to 113°F) Display:* -10 to 45°C (14 to 113°F) *The display will turn off when the ambient temperature is above/below the display operation temperature, but other functions will remain functional. (Effective after firmware v1.3.28)
Ambient operating humidity	5 to 90% noncondensing
Certifications	CE, FCC, IC

Software

Management application	UniFi Access: Version 3.0.15 and later
-------------------------------	--

Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.