

Switching WiFi Camera Security Door Access Cloud Keys & Gateways Power Tech New I


Door Access > [Access Ultra](#)

Datasheet

In The Box

Marketing Images

Installation Guide

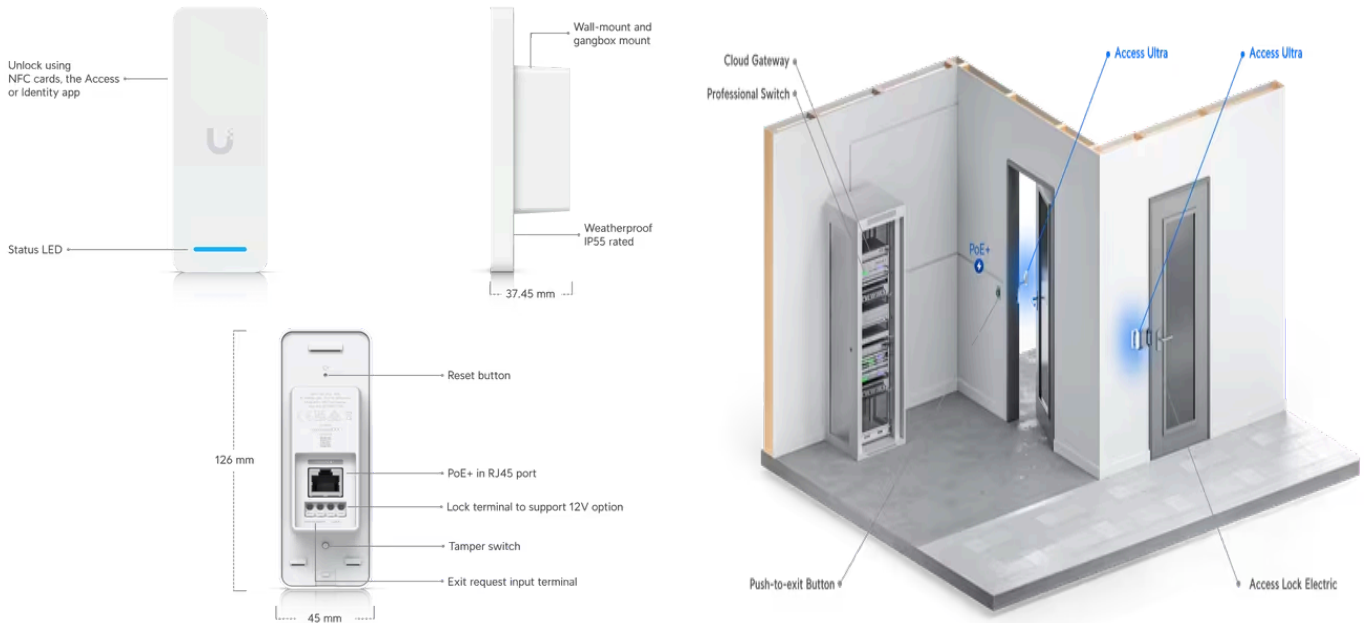

Mechanical

Dimensions 126 x 45 x 37.45 mm (4.9 x 1.8 x 4.5")

Weight 140 g (4.9 oz)

Enclosure material Polycarbonate, aluminum alloy

Mounting Wall mount, gang box mount

Weatherproofing IP55

Hardware

Networking interface	10/100 MbE RJ45 port
Connectivity	Ethernet BLE 4.2
Digital input	(1) Exit request
Lock terminals	(1) 12V, 1A
Power method	PoE+
Max. power consumption	18W
ESD/EMP protection	Air: ±8kV, contact: ± 4kV
LEDs	R/G/B/W
Button	(1) Factory reset
Tamper switch	Yes
Speaker	Buzzer
NFC frequency	13.56 Mhz
NFC read range	< 50 mm
NFC standards	ISO 14443A, 14443B, 15693
NFC technology	NFC Tag 1,2,3,4,5 MIFARE Classic MIFARE Plus Mifare Ultralight MIFARE DESFire
Ambient operating temperature	-30 to 40° C (-22 to 104° F)
Ambient operating humidity	5 to 90% noncondensing
Certifications	CE, FCC, IC

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.