



SmartNode™ DTA

Single/Dual-Port ISDN BRI VoIP Terminal Adapter

The SmartNode Digital Terminal Adapter (DTA) brings the advantages of high-quality VoIP to ISDN users. It connects ISDN terminals on one or two BRI/So ports, and converts up to 4 concurrent voice or fax calls to SIP or H.323.

Up to Four Simultaneous SIP or T.38 Calls

With 1/2 ISDN So BRI ports and one 10/100Base-TX Ethernet port.

Proven Interoperability

Interoperable with all major-brand softswitches and a wide range of Internet telephony providers.

Comprehensive Signaling Protocol Support

Supports SIP, H.323, ISDN telephony plus T.38 and SuperG3 FAX over TDM/PSTN and IP/Ethernet services simultaneously.

Transparent ISDN Features

Complex number manipulation and mapping for seamless integration with existing infrastructures, CLIP, CLIR, AOC, PARE, hold, transfer, SIP overlap dialing and much more.

Instant ISDN to VoIP Connectivity

Provides one or two internally powered So interfaces for up to 8 terminals. Simultaneously converts up to 4 voice and fax calls to VoIP.

High Precision Clock (HP models)

Delivers DECT PBX interoperability with reliable fax and modem performance.

Management & Provisioning

Built-in Web-based management, SNMP, command line interface and auto-provisioning for automated configuration distribution and software upgrades. RADIUS for call detail records (CDR) and user authentication.

SmartNode™ Awards

- **2010 Internet Telephony Product of the Year:** SmartNode™ 5400
- **2009 Internet Telephony Product of the Year:** SmartNode™ 4400 Series
- **2008 Internet Telephony Product of the Year:** SmartNode™ 4961
- **2007 Internet Telephony Product of the Year:** SmartNode™ S-DTA
- **2006 Internet Telephony Product of the Year:** SmartNode™ 4960

The Smart-DTA enables integration of ISDN network users into a local VoIP phone service, or extends an ISDN line of a PBX to a remote site over IP. It offers a simple end-user configuration interface and connects both to a PBX in point-to-point mode and an So bus in point-multipoint mode.

The SN-DTA enables the connection of ISDN terminals or SOHO PBXs to a VoIP network or Internet Telephony Service. It can connect to ISDN PBXs in point-to-point mode and ISDN Terminals in point-multipoint mode (S-Bus) and offers a feature rich configuration interface.


Like every SmartNode the DTA includes intelligent call routing technology with advanced features like number plan adaptations, mappings between ISDN and SIP/H.323, manipulation of call properties through regular expressions, routing calls based on time-of-day or bearer capability criteria and much more.

Key ISDN services such as AOC, PARE, CLIP, COLP, etc. are mapped using industry standard methods to SIP and H.323.



The SN-DTA supports SIP overlap dialing (RFC3578) for countries with dynamic dialplans. The integrated ISDN line-power feeds connected terminals in the same way as a legacy ISDN NT to enable a seamless switchover from an ISDN to VoIP access.

Gateway functions use standard CODECs such as G.711, G.723, G.729, and T.38 fax as well as industry standard SIP and H.323 signaling protocols to ensure seamless connection and compatibility for all voice services. Comprehensive quality of service (QoS) features offer traffic classification and tagging options that include TOS, DiffServ and VLAN 802.1p/Q tagging.

Visit www.patton.com for more information.

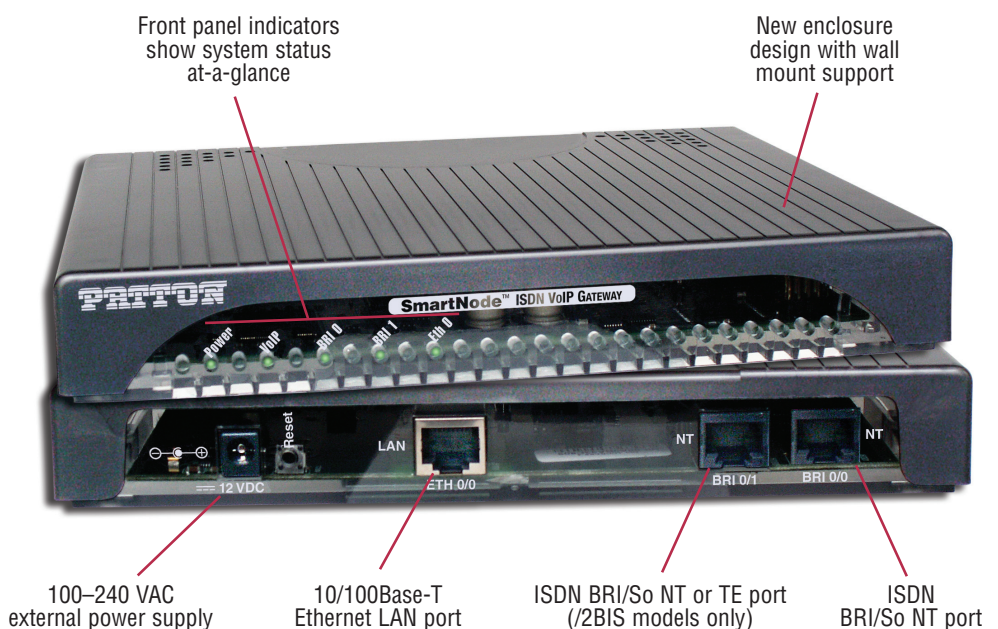

Typical Application

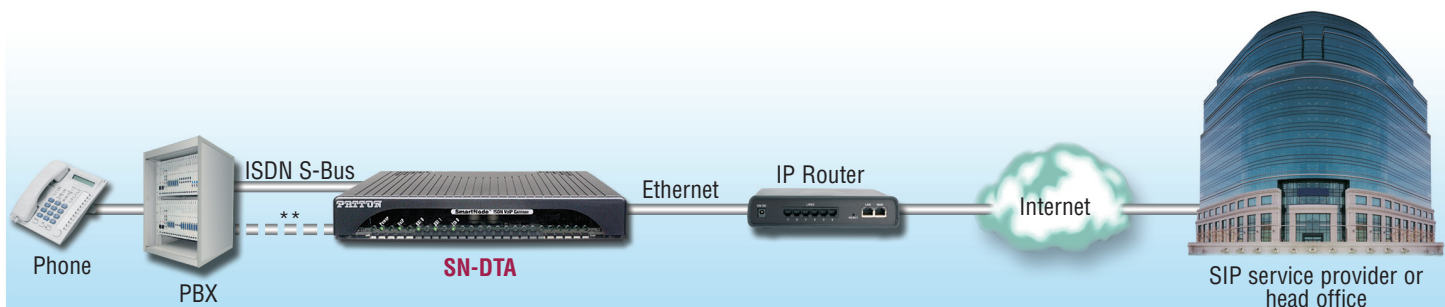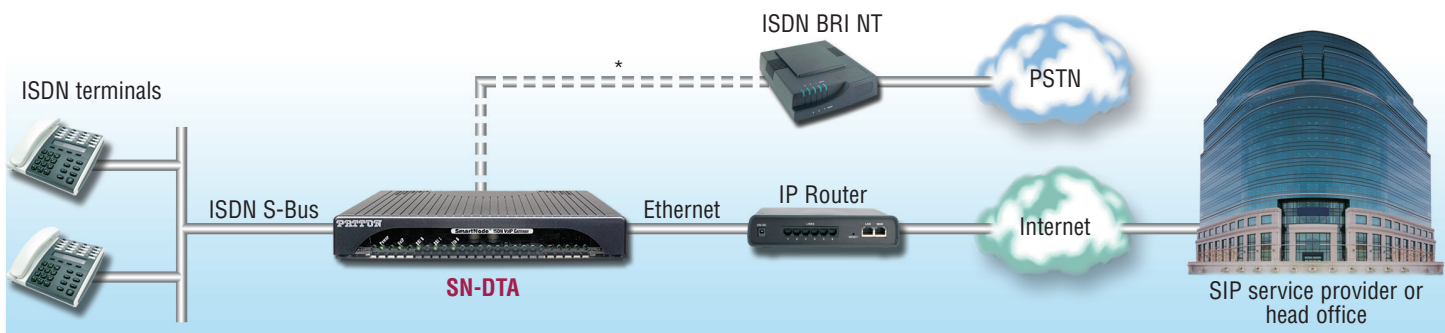

* ISDN PSTN fallback with relay (SN-DTA/2BIS2V/EUI only)

** SN-DTA/2BIS4V/EUI only

Specifications*

WAN Connectivity

10/100Base-T Ethernet LAN • Auto- MDI-X • DHCP Client • PPPoE Client (multi-session) • SNTP • IP Multinetting • VLAN

IP Quality of Service

IEEE 802.1p, TOS, DiffServ Labeling • IEEE 802.1Q, VLAN Tag insertion/deletion (4,096 VLANs)

Management

Web-based GUI • Fully documented CLI • Telnet and HTTP access • TFTP configuration up- and download • TFTP/HTTP firmware upgrade • SNMPv1 agent, MIB II and enterprise MIB • Built-in diagnostic tools • Auto-Provisioning—Configuration and Firmware, Syslog, RADIUS

Fax and Modem Support

T.38 fax over IP • Fax relay and bypass • Modem bypass

ISDN Specification

1/2 port Euro-ISDN BRI/So RJ-45, NT/TE • DSS-1, Q.921, Q.931 • Point-to-point & point-to-multipoint • Line power for ISDN terminals, high precision clock option (HP models)

Voice Signaling

SIPv2 • H.323v4 • SIP call transfer, redirect • Overlap or en-bloc dialing • DTMF in-band & out-of-band • Configurable call progress tones • CLIP • CLIR • AOC • PARE

Call Routing & Services

Regular expression number matching • Regular expression number manipulation • Least Cost Routing Number blocking • Short-Dialing • Digit collection • Distribution-Groups & Hunt-Groups • 2nd call offering

Voice Processing

G.723.1 (5.3/6.3 kbps) • G.729, G.729a, G.729ab (8 kbps) • G.726 ADPCM (16, 24, 32, 40 kbps) • G.168 echo cancellation (25 ms) • Transparent ISDN data • Silence suppression and comfort noise • Adaptive and configurable dejitter buffer • Configurable packet length

Power Consumption

< 4W

Operating Temperature

0 to 40°C (32 to 104°F)

Dimensions

20.8W x 3.4H x 16.5D cm
(8.2W x 1.3H x 6.5D in.)

Weight

< 450 g (15.9 oz)

Humidity

Up to 90%, non condensing

Compliance

FCC Part 15 Class B (US EMC) • CE per RTTE 99/5/EC (EMC and LVD) • Safety—EN60950 • TBR-3 (ISDN BRI/So)

Ordering Information

SN-DTA/1BIS2V/EUI: SmartNode™ ISDN BRI VoIP Terminal Adapter, 1x BRI/So NT with phantom power, 2 voice/fax calls, 1x 10/100 Ethernet, external UI power (100–240 VAC), 1 year warranty

SN-DTA/2BIS2V/EUI: SmartNode™ ISDN BRI VoIP Terminal Adapter, 2x BRI/So (1xNT, 1xTE) with fallback relay and phantom power on NT port, 2 voice/fax calls, 1x 10/100 Ethernet, external UI power (100–240 VAC), 1 year warranty

SN-DTA/2BIS4V/EUI: SmartNode™ ISDN BRI VoIP Terminal Adapter, 2x BRI/So NT with phantom power, 4 voice/fax calls, 1x 10/100 Ethernet, external UI power (100–240 VAC), 1 year warranty

SN-DTA/2BIS4VHP/EUI: SmartNode™ ISDN BRI VoIP Terminal Adapter, 2x BRI/So NT with phantom power, high precision clock source, 4 voice/fax calls, 1x 10/100 Ethernet, external UI power (100–240 VAC), 1 year warranty

* Specifications subject to change without notice.

PE-Inalp Networks Private Ltd
An Associate of
PATTON
Electronics Co., USA

Old No. 14 and New No.6,
Brahadambal Road,
Nungambakkam High Road
Chennai: 600 034, India
Phone **+91 44 45490395/6/7**
Fax **+91 44 4549.0394**
Email **sales@patton.co.in**
Web **www.patton.co.in**

Patton-Inalp Networks AG

PATTON
inalp networks

Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone **+41 (31) 985 25 25**
Fax **+41 (31) 985 25 26**
E-mail **sales@inalp.com**
Web **www.inalp.com**

Patton Electronics Co.

PE PATTON
Electronics Co.

7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone **+1 301 975 1000**
Fax **+1 301 869 9293**
E-mail **sales@patton.com**
Web **www.patton.com**

07MSNDTA-DS1

Patton is a registered trademark and the terms SmartNode, DownStreamQoS and SessionRouter are trademarks of Patton Electronics Company in the United States and other countries.