

UniFi UISP Branding

Q UA-G3-SK

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech Inte


Kits > G3 Starter Kit

Datasheet

In The Box

Marketing Images

Installation Guide

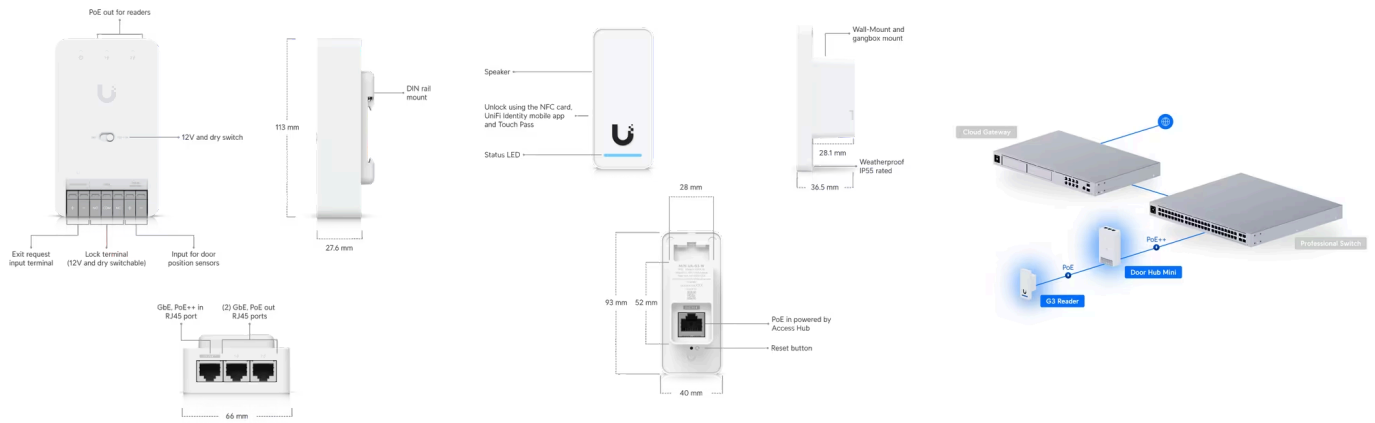

UA-Hub-Door-Mini Mechanical

Dimensions 113 x 66 x 27.6 mm (4.4 x 2.6 x 1.1")

Weight 190 g (6.7 oz)

Enclosure material Polycarbonate, metal

Hardware

Networking interface (3) GbE RJ45 ports

Power method PoE++

Max. power consumption Without PoE output: 19W
With PoE output: 50W

PoE input 50V DC, 1A

PoE output	(2) PoE ports, total 31W
Button	(1) Factory-reset (1) Dry/Wet switch
Digital input	Request to exit/door position sensor
Output relay	Dry: 30V DC, 1A Wet: 12V DC, 1A

Recommend max. cable length	18 AWG UACC-Cable- DoorLockRelay length	20 AWG length	22 AWG length
UA-Lock-Electric (400mA)	100 m (328 ft)	66 m (217 ft)	42 m (138 ft)
UA-Lock-Magnetic-270kg (800mA)	46 m (151 ft)	30 m (98 ft)	20 m (66 ft)
UA-Lock-Magnetic-540kg (500mA)	80 m (262 ft)	51 m (167 ft)	32 m (105 ft)
Other locks (1A)	36 m (118 ft)	24 m (79 ft)	15 m (49 ft)

PoE cabling requirements Cable 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation. The minimal conductor gauge permitted to connect between the PSE or power source and the PD shall be 26 AWG (0.13 mm²) for patch cords; 24 AWG (0.21 mm²) for riser cable.

Operating environment	Indoor use only
Ambient operating temperature	-10 to 40° C (14 to 104° F)
Ambient operating humidity	5 to 90% noncondensing
Software information	The software version of a product can be checked at https://unifi.ui.com
Certifications	CE, FCC, IC
Document number, and issue date and/or revision level	UA-Hub-Door-Mini, V01

Software

Management application	UniFi Access: Version 2.5.2 and later
-------------------------------	---------------------------------------

LEDs

PoE in	System status
PoE out	Wire status/activity
Input/output relay	Wire status/activity

UA-G3

Mechanical

Dimensions	93 x 40 x 36.5 mm (3.7 x 1.6 x 1.4")
Weight	82 g (2.9 oz)
Enclosure material	Polycarbonate, glass
Mounting material	Aluminum alloy
Mounting	In wall, gang box
Weatherproofing	IP55

Hardware

Networking interface	(1) 10/100 MbE RJ45 port
Connectivity	BLE 4.1 NFC
Power method	PoE UL 294 Power-limited Class 2 PSU UL 60950-1/62368-1 LPS/PS2 PSU
Supported voltage range	48V DC
Max. power consumption	5W
ESD/EMP protection	Air: ±15kV, contact: ±8kV
Sensors	Proximity sensor
Speaker	(1) 8 ohm, 0.7W
LEDs	(1) Status light
Button	(1) Factory-reset

NFC frequency	13.56 MHz
NFC read range	< 30 mm
NFC technology	ISO/IEC 14443A / 14443B / 15693 / 18092 (Ecma 340) MIFARE Classic / MIFARE DESFIRE Sony FeliCa™ (ID only) NFC Forum tags T1T, T2T, T3T, T4T and T5T ECP 2.0
Operating environment	Outdoor use
Ambient operating temperature	-30 to 45° C (-22 to 113° F)
Ambient operating humidity	5 to 90% noncondensing
Software information	The software version of a product can be checked at https://unifi.ui.com
UL 294 level	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
UL 294 statement	Compliance with IEEE 802.3 specifications was not verified as part of UL 294 The equipment is intended to comply with the section of the National Electric ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuit
PoE cabling requirements	Cable 5e cabling is the minimum performance category recommended. The pe category utilized should match the transmission speed required at the installat The minimal conductor gauge permitted to connect between the PSE or powe the PD shall be 26 AWG (0.13 mm ²) for patch cords; 24 AWG (0.21 mm ²) fo or riser cable.
CAN/ULC-60839-11-1 Grade	Grade assignment: I
Certifications	CE, FCC, IC, UL 294, CAN/ULC-60839-11-1
Document number, and issue date and/or revision level	UA-G3, V01

Software

Management application	UniFi Access: Version 3.0.15 and later
-------------------------------	--

UA-Pocket Mechanical

Dimensions	84 x 39 x 7.4 mm (3.3 x 1.5 x 0.29")
-------------------	--------------------------------------

Weight	16 g (0.56 oz)
Enclosure material	Polycarbonate, stainless steel, silicone rubber
Weatherproofing	IP54

Hardware

NFC frequency	13.56 MHz
NFC technology	ISO/IEC 14443 Type A MIFARE DESFire EV3 4K UniFi Access Proprietary Security Protocol
Ambient operating temperature	-10 to 45° C (14 to 113° F)
Ambient operating humidity	10 to 90% noncondensing
Certification	CE

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.