

Tech Specs


UniFi UISP Branding

- Switching
- WiFi
- Camera Security
- Door Access
- CloudKeys & Gateways
- Power Tech
- New I

Camera Security > [Protect All-In-One Sensor](#)

Datasheet

- In The Box
- Marketing Images
- Installation Guide

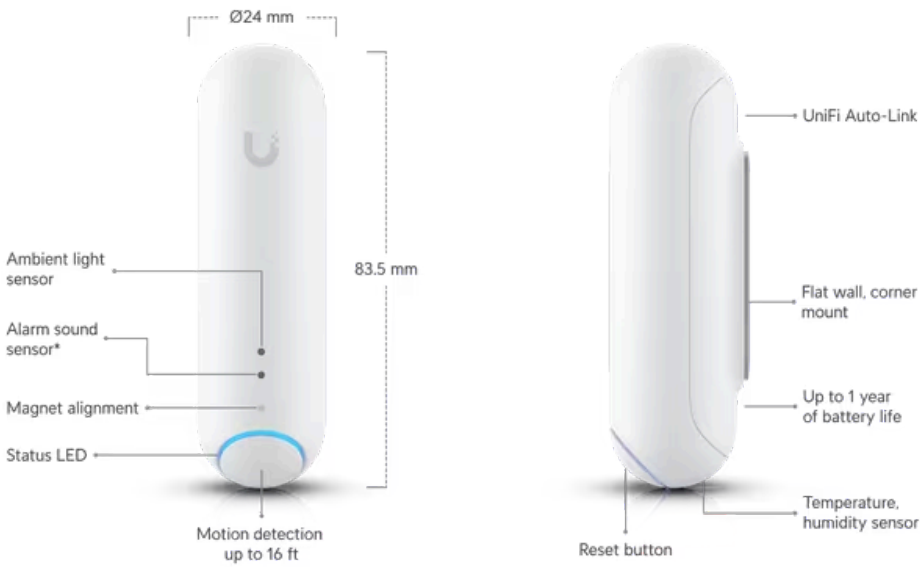

*Based on UL217 and UL2034 alarm patterns.

Mechanical

Dimensions	Ø24 x 83.5 mm (Ø0.9 x 3.3")
Weight	50.2 g (1.8 oz)
Enclosure material	Polycarbonate
Mount material	Flat wall mount: polycarbonate, adhesive Corner mount: polycarbonate, adhesive
Additional gear	Magnet (1) Water sensor adapter (Only available in the 3-pack.)

Hardware

Networking interface	Bluetooth 5.0, BLE
Max. TX power	5 dBm
Max. power consumption	77mW
Power method	Lithium battery CR123A
Sensor features	Motion sensor (5 m/16 ft max. range) Magnetic entry sensor for door or window open/close Accelerometer for garage door open/close Temperature sensor Humidity sensor Ambient light sensor Alarm sound sensor Water sensor for detecting leaks and floods (requires water sensor adapter accessory, only available in 3-pack) BLE connectivity from access point in indoor setting (recommended range 15 m/49 ft, performance will vary based on environment)
Antenna	2.4GHz
Antenna gain	0.5 dBi
LEDs	R/B/W
Button	Factory reset
Ambient operating temperature	0 to 45° C (32 to 113° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

Software

Web application	UniFi Protect
Mobile app	UniFi Protect iOS™ and Android™

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.