

UniFi UISP Branding



Search UniFi products

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech New I

New Integrations > Mobile Router Industrial

Datasheet

In The Box	Marketing Images	Installation Guide
------------	------------------	--------------------

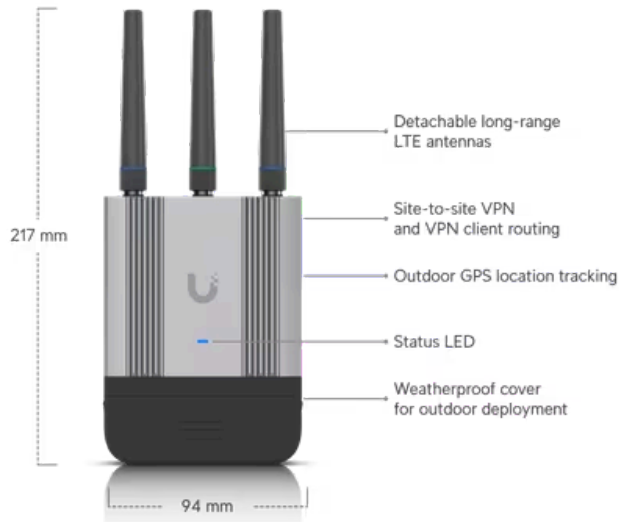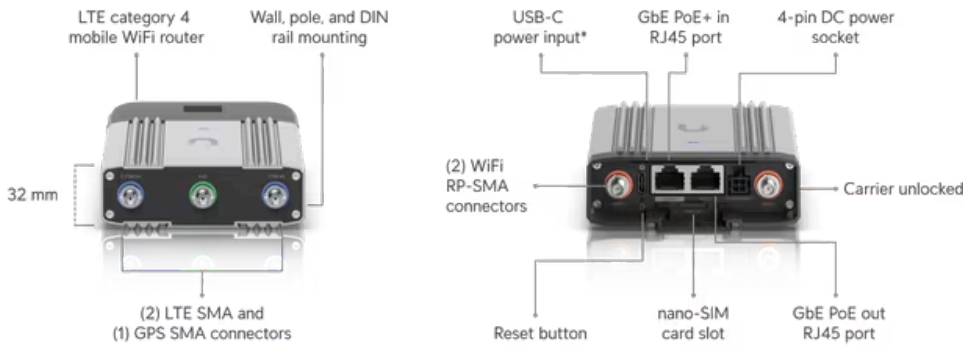

*USB-C, 5V DC, 3A adapter included.

Mechanical

Dimensions

Without outdoor cover: 114.5 x 93.6 x 32 mm (4.5 x 3.7 x 1.3")
With outdoor cover: 217 x 94 x 32 mm (8.5 x 3.7 x 1.3")

Weight

Device: 360 g (12.7 oz)
Device with outdoor cover: 395 g (13.9 oz)

DIN rail/wall mounts: 25 g (0.9 oz)

Enclosure material	Polycarbonate, aluminum
Mount material	Wall/pole mount: polycarbonate DIN rail mount: polycarbonate
Pole mount diameter	1-2" on pipe outer diameter
Wind loading	38.8 N at 200 km/h (8.7 lbf at 125 mph)
Weatherproofing	Device with outdoor cover: IP66

Hardware

Management interface	Ethernet WiFi
Networking interface	(2) GbE RJ45 ports LTE Category 4 radio WiFi 4
PoE interface	(1) PoE input (1) PoE output* (Max. 10W) *Requires a PoE+ switch.
Power supply	UniFi PoE switch (48—54V DC) USB Type-C (5V DC) 4-pin* ATX DC power socket (9—30V DC) *Pin 1 for Power + and Pin 2 for Ground -. Please refer to the Installation Guide for detailed power socket pinout.
Max. power consumption	12.5W
SIM	nano-SIM (4FF)
LTE bands	B2, B4, B5, B12, B13, B14, B25, B26, B66, B71
LTE throughput speed*	Download 150 Mbps / Upload 50 Mbps *Speed depends on network coverage and performance at the device location.
WiFi standards	802.11 b/g/n, WiFi 2.4G, 20/40 MHz
Max. WiFi TX power	22 dBm
WiFi MIMO	2 x 2
GPS	Yes
Antenna SMA ports	(1) Mobile 1: SMA female connector, supports 1Tx and 1Rx (1) Mobile 2: SMA female connector, supports 1Rx only (1) GPS: SMA female connector (2) WiFi: RP-SMA female connectors

Note: Ensure all SMA / RP-SMA connectors are secured with antennas or the provided caps to maintain weatherproofing.

External antennas	(2) Mobile/LTE antennas with SMA male connectors (1) GPS antenna with SMA male connector (2) WiFi antennas with RP-SMA male connectors
LED	Status: blue/white
Button	Factory reset
Mounting	DIN rail/wall/pole mount (Included)
Ambient operating temperature	-40 to 70° C (-40 to 158° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	FCC, IC, PTCRB, GCF, AT&T, T-Mobile, Verizon, Wi-Fi Alliance®

Supported WiFi Data Rates

802.11b	1, 2, 5.5, 11 Mbps
802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n (WiFi 4)	6.5 Mbps to 300 Mbps (MCS0 - MCS7, HT 20/40)

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.