

[UniFi](#) [UISP](#) [Branding](#)

Q Search UniFi products

[Switching](#) [WiFi](#) [Camera Security](#) [Door Access](#) [CloudKeys & Gateways](#) [Power Tech](#) [Inte](#)



Utility > [Flex 2.5G PoE](#)

Datasheet

In The Box

Marketing Images

Installation Guide

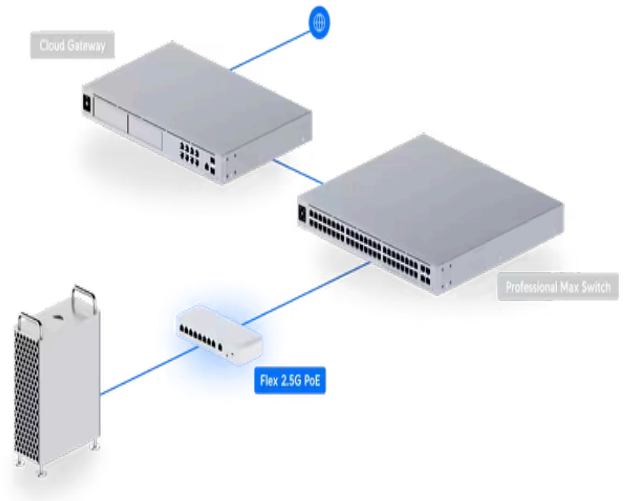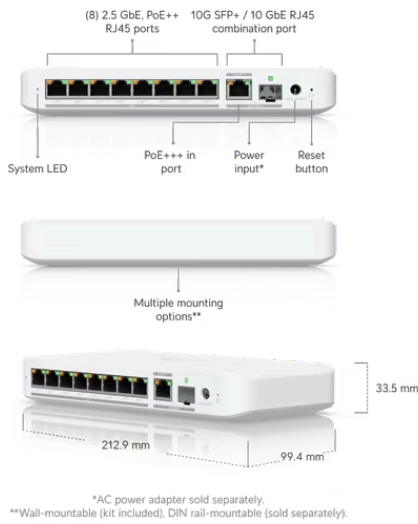

Mechanical

Dimensions	212.9 x 99.4 x 33.5 mm (8.4 x 3.9 x 1.3")
Weight	567 g (20 oz)
Enclosure material	Polycarbonate
Mounting	Wall-mountable (kit included) DIN rail-mountable (sold separately)

Hardware

Management interface	Ethernet In-Band
-----------------------------	------------------

Networking interface	(8) 2.5/1 GbE RJ45 ports (1) 10G SFP+ or 10/5/2.5/1 GbE combination port* While only one is active, GbE can receive power and SFP+ can be utilized for data.
PoE interface	(8) 60W PoE++ (Pair A 1, 2+; 3, 6-) (Pair B 4, 5+; 7, 8-)
Total non-blocking throughput	30 Gbps
Switching capacity	60 Gbps
Forwarding rate	44.64 Mpps
Power method	(1) AC power adapter, 54V DC, 3.9A (Not included) (1) PoE+++ (PairA 1, 2+; 3, 6-)(PairB 4, 5+; 7, 8-)
Power supply	External AC/DC adapter UniFi PoE switch
Supported voltage range	AC/DC input: 54V DC (DC jack) PoE input: 50—57V DC
Max. power consumption	PoE input: 14W (Excluding PoE output) AC input: 17W (Excluding PoE output)
Total available PoE	PoE+++ input: 57W PoE++ input: 37W PoE+ input: 12W 210W AC adapter input: 196W
Max. PoE wattage per port by PSE	PoE: 15.4W PoE+: 30W PoE++: 60W
Voltage range PoE mode	PoE: 44—57V PoE+/PoE++: 50—57V
Button	Factory reset
Ambient operating temperature	-20 to 45° C (-4 to 113° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Switching Features

Layer 2 features	STP / RSTP with priorities and port-level disable Storm control Multicast / broadcast rate limiting Flow control Jumbo frames Egress rate limit
-------------------------	--

Proprietary loop protection
Port isolation
Port mirroring

LEDs

System	Blue/white: power Blinking white: bootup in progress Blinking blue: firmware upgrading Steady white: factory defaults; unit is awaiting adoption Steady blue: unit is adopted
---------------	---

Ethernet	Link/activity PoE input/output
-----------------	-----------------------------------

SFP+	Link/activity
-------------	---------------

Application Requirements

UniFi Network	Version 9.0.108 and later
----------------------	---------------------------

Stay in Touch

<input type="text" value="Email"/>	<input type="button" value="Subscribe"/>
------------------------------------	--



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.