


Switching WiFi Camera Security Door Access Cloud Keys & Gateways Power Tech New Ii

Camera Security > [G4 Dome](#)

Datasheet

- In The Box
- Marketing Images
- Installation Guide

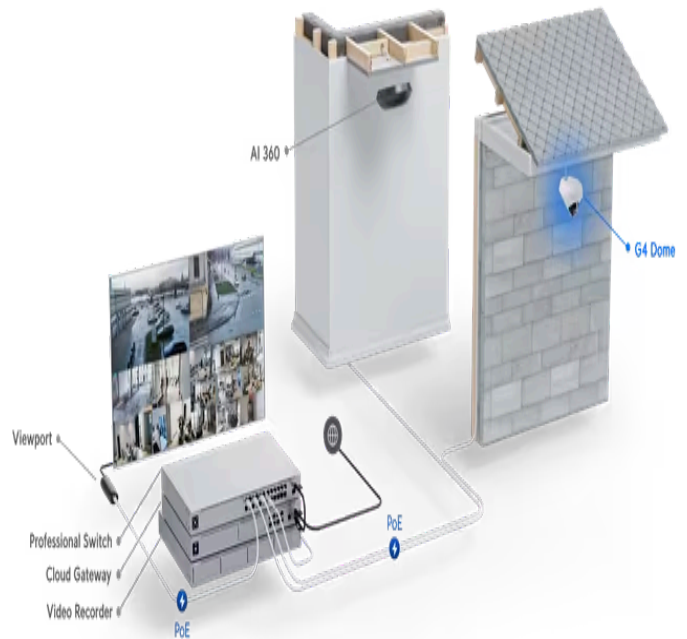

Mechanical

Dimensions Ø109.2 x 64.5 mm (Ø4.3 x 2.5")

Weight Without mount: 370 g (13.1 oz)
 With mount: 390 g (13.8 oz)

Enclosure material Aluminum alloy, polycarbonate, hard-coated dome

Mount material Polycarbonate, stainless steel

Weatherproofing IPX4

Resistance IK08

Optics

Sensor 5MP CMOS

Lens Fixed focal length

View angle H: 102.4°, V: 71.4°, D: 134.3°

Night mode Built-in light sensor, IR LED illumination and IR cut filter

Video

Resolution 4MP 2688 x 1512 (16:9)

Max. frame rate 24 FPS

Image settings Brightness, contrast, sharpness, saturation, noise reduction, 50/60 Hz

System

Processor Quad-core Arm® Cortex®-A53 based chip

Networking interface GbE RJ45 port

Max. power consumption 5W

Power method PoE

Supported voltage range 44—57V DC

LED R/G/B/W

Button Factory reset

Mounting Wall, ceiling mount

Ambient operating temperature -20 to 40° C (-4 to 104° F)

Ambient operating humidity 0 to 90% noncondensing

Certifications FCC, IC, CE

Audio

Microphone Yes (Can be disabled)

Speaker Yes

Software

Web application UniFi Protect

Mobile app UniFi Protect iOS™ and Android™

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.