


[UniFi](#) [UISP](#) [Branding](#)

[Switching](#) [WiFi](#) [Camera Security](#) [Door Access](#) [CloudKeys & Gateways](#) [Power Tech](#) [Inte](#)


Outdoor > [U7 Pro Outdoor](#)

[Datasheet](#)

- [In The Box](#)
- [Marketing Images](#)
- [Installation Guide](#)

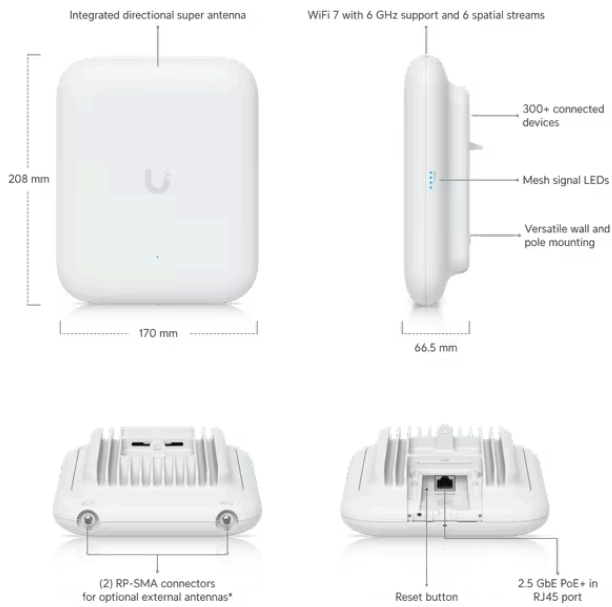

\*Includes external omni antennas.

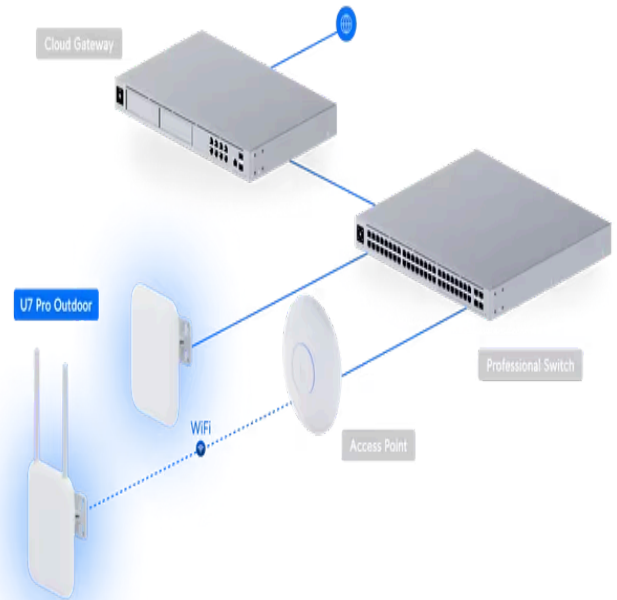

## Mechanical

### Dimensions

Without mount: 170 x 208 x 66.5 mm (6.7 x 8.2 x 2.6")  
 With mount: 170 x 208 x 121.8 mm (6.7 x 8.2 x 4.8")

### Weight

Device: 1.2 kg (2.6 lb)  
 Mount: 130 g (0.3 lb)

### Enclosure material

UV-stabilized polycarbonate, aluminum alloy

### Mount material

UV-stabilized polycarbonate

### Pole mount diameter

25–63.5 mm (1–2.5") on pipe outer diameter

### Wind survivability

74.6 N at 200 km/h (16.8 lbf at 125 mph)

<b>Weatherproofing</b>	IPX6 IP67 with cable-gland door kit (Included)
------------------------	---

---

## Hardware

<b>Networking interface</b>	(1) 1/2.5 GbE RJ45 port
<b>Management interface</b>	Ethernet
<b>Power method</b>	PoE+
<b>Power supply</b>	UniFi PoE switch
<b>Supported voltage range</b>	42.5—57V DC
<b>Max. power consumption</b>	21W
<b>Max. TX power</b>	
2.4 GHz	23 dBm
5 GHz	26 dBm
6 GHz	26 dBm*
	*With 6 GHz Extended Range mode. Available in FCC/IC region only.
<b>MIMO</b>	
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
5 GHz	2 x 2 (DL/UL MU-MIMO)
6 GHz	2 x 2 (DL/UL MU-MIMO)
<b>Max. data rate</b>	
2.4 GHz	688 Mbps (BW40)
5 GHz	4.3 Gbps (BW240)
6 GHz	5.7 Gbps (BW320)
<b>Antenna gain</b>	
2.4 GHz	Directional internal: 8 dBi / External omni: 6 dBi
5 GHz	Directional internal: 11 dBi / External omni: 8 dBi
6 GHz	Directional internal: 10 dBi / External omni: -
<b>Antenna beamwidth</b>	
2.4 GHz	90°
5 GHz	90°
6 GHz	90°
<b>Antennas</b>	(1) Directional internal antenna (2) RP-SMA connectors for external antenna
<b>LEDs</b>	(1) Power: white/blue (4) Mesh signal: blue
<b>Button</b>	Factory reset
<b>Mounting</b>	Wall, ceiling, pole (Included)

<b>Ambient operating temperature</b>	-30 to 60° C (-22 to 140° F)
<b>Ambient operating humidity</b>	5 to 95% noncondensing
<b>Certifications</b>	FCC, IC

---

## Software

<b>WiFi standards</b>	802.11a/b/g/n/ac/ax/be (WiFi 6, WiFi 7)
<b>Wireless security</b>	WPA-PSK, WPA-Enterprise (WPA/WPA2/WPA3/PPSK)
<b>BSSID</b>	8 per radio
<b>VLAN</b>	802.1Q
<b>Advanced QoS</b>	Per-user rate limiting
<b>Guest traffic isolation</b>	Supported
<b>Concurrent clients</b>	300+

---

## Supported Data Rates

<b>802.11a</b>	6, 9, 12, 18, 24, 36, 48, 54 Mbps
<b>802.11b</b>	1, 2, 5.5, 11 Mbps
<b>802.11g</b>	6, 9, 12, 18, 24, 36, 48, 54 Mbps
<b>802.11n</b>	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
<b>802.11ac</b>	6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
<b>802.11ax (WiFi 6)</b>	7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)
<b>802.11be (WiFi 7)</b>	7.3 Mbps to 5.7 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240/320)

---

## Application Requirements

<b>UniFi Network</b>	Version 9.0.108 and later
----------------------	---------------------------

### Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.